
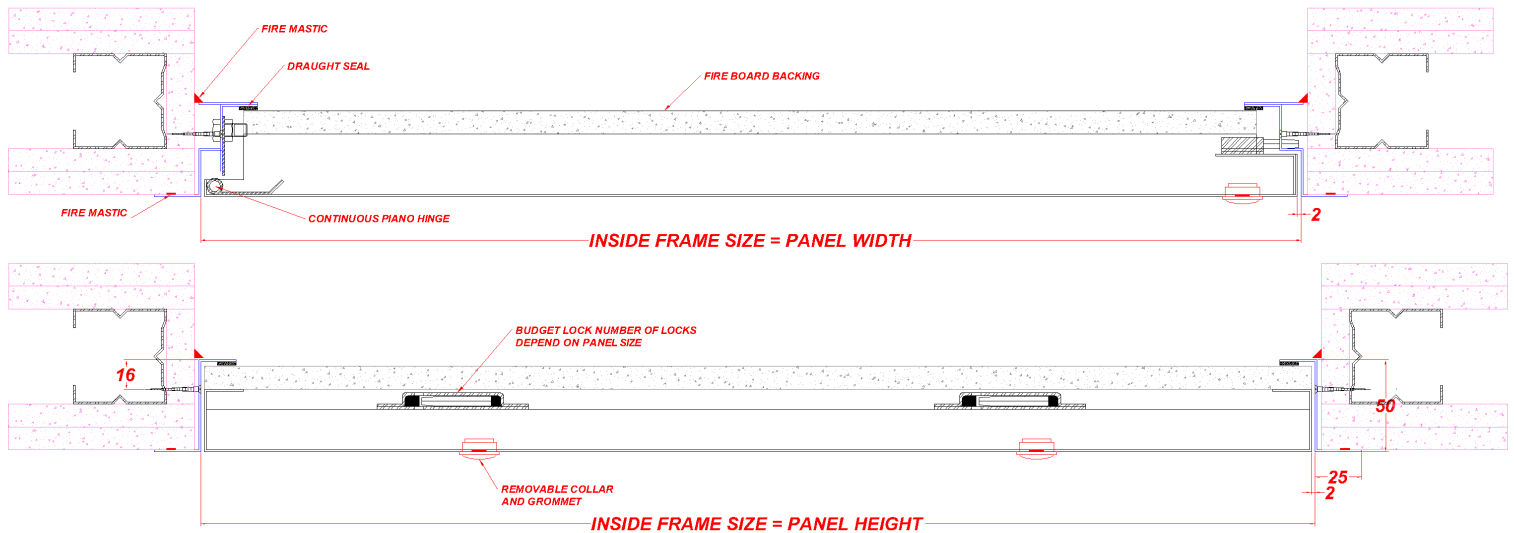


WALL
ONLY

PAL02-060-MD-PF-BL

The Palco PAL02-060-MD-PF-BL Fire Rated range of Access Panels are simple to install and suitable for both walls where regular maintenance to services is required.



Description

This panel is designed to fit into a structural membrane of a joint-less plasterboard wall or ceiling system. It is manufactured with a 25mm wide picture frame. The panel has a Metal faced door. The panels door leaf is locked in place via a Budget Lock as standard other lock options are available upon request. The Panel is Powder Coated RAL 9010 30% Gloss. Other colours available upon request.

Tests

The Panel is 1 Hour Fire Rated for integrity up to 2000x900mm in a wall application tested in accordance with B.S. 476: Part 22: 1987 & up to 1185x1185mm in a ceiling application tested in accordance with B.S 476: Part 22: 1987.

The Panel is not acoustic rated.

The Panel is not Air Pressure tested.

The Panel is not Smoke tested.

Composition & Manufacture

The EX02-060-MD-PF-BL is manufactured from Zintec Steel with a 0.9mm thick Door and 1.2mm Thick Frame. The panels door leaf is hinged by a full Piano hinge.

Seals

Intumescent Seals **NO** , Draught Seals **YES**, Acoustic Seals **NO**, Smoke Seals **NO**, Air Seals **NO**

Fitting

Make sure the structural opening is at least 7mm larger than the panel size, back of frame size. E.G a 600x600mm panel size requires a 607x607mm hole size. Remove the door from the frame and place the frame into the set hole. Fix through the appropriate fixing holes within the frame ensuring the frame is pushed up against the structural opening surround. Check the frame is square by measuring corner to corner. Refit door and lock in place; the door and frame should be flush. Independent bracing or support may be required to take the weight of the Access Panel. Apply Intumescent acrylic mastic on both faces of the frame, nominally 5mm wide sealing to the supporting construction.